

型号类别 / IDENTIFICATION

产品型号	P-No.	SKS-CKSG-3.94-4A5/7
产品系列号	Model family	CKSG

电抗器类别 / Reactor type 解谐电抗器 / Detuned Harmonic Reactor

技术参数 / TECHNICAL DATA

相数	No. of phase		3
额定电压	Rated voltage	[V]	440
电压范围	Voltage range	[V]	440±10%
额定频率	Rated frequency	[Hz]	50
配电线路要求	Requirements to Distribution line		According to EN 61000-2-4 Class III 符合EN 61000-2-4 Class III
额定电流	Rated current	[A]	99.6
电容容量	Capacity of capacitor	[kvar]	56.2
防护等级	Protection class		IP00
电抗率	Impedance rate	[%]	7
绝缘等级	Insulation Class		H
总损耗	Power loss	[W]	290
电感量	Inductance	[mH]	0.77

运行条件 / TECHNICAL DATA

环境温度	Ambient temperature	[°C]	-25....+50
冷却方式	Type of cooling		AN

执行标准 / STANDARDS


类型 / TYPE	标志 / SIGNS
IEC 60289	CE
EN 60289	
GB/T1094.1	
GB/T1094.6	

注释 / NOTES

典型技术规格
可能因材料和生产公差而有所不同。
*=IE2 假定电机效率和逆变器效率>95%

Technical specifications are typical.
They can vary due to material and production tolerances.
*=IE2 motor efficiencies and inverter efficiency >95% assumed

外形尺寸及安装尺寸 / Dimensions and mounting dimensions

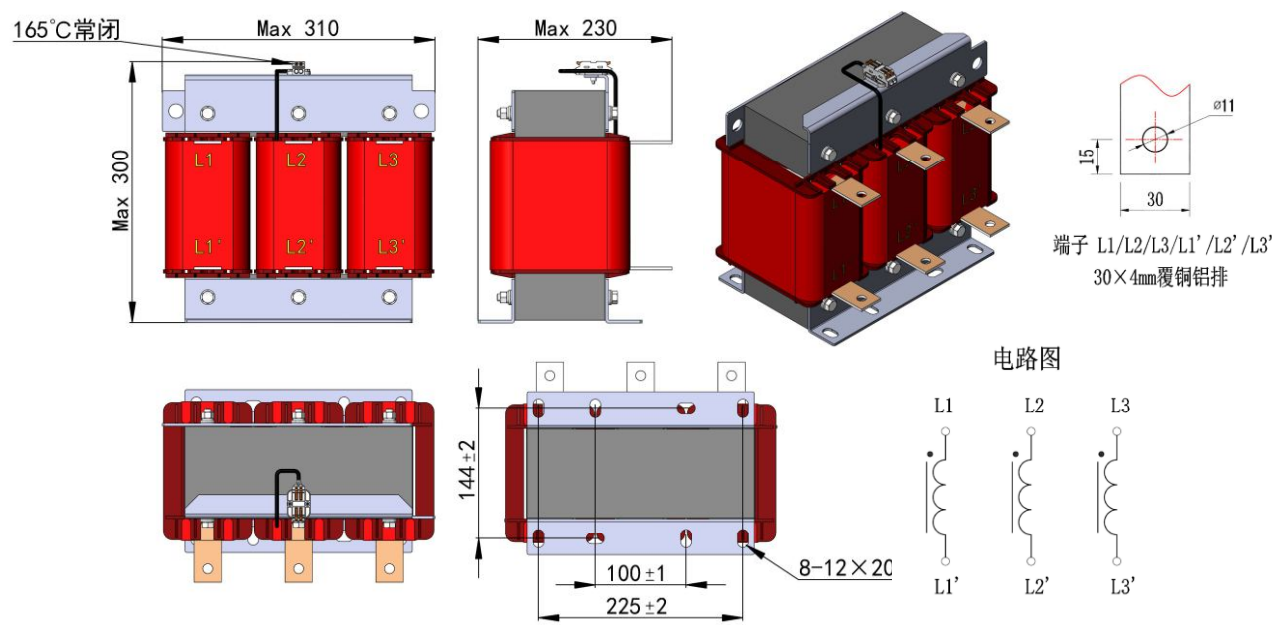

重量 / WEIGHT

重量	Weight	[kg]	47
----	--------	-------	----

连接端子 / TERMINALS

输入	Input	[L1, L2, L3]	规格 / Type
输出	Output	[L1', L2', L3']	Copper bar
			Copper bar

注释 / NOTES

图纸中的技术规格我司没有义务保证100%准确。
一般公差符合DIN 7168-m。
如有变更,恕不另行通知

Technical specifications in the drawing are without obligation.
General tolerance to DIN 7168-m.
Subject to change.